



# HOOK LOADERS

WHERE EXCELLENCE COMES AS STANDARD



[www.hyva.com](http://www.hyva.com)



# HYVA LIFT HOOK LOADERS

## ADVANTAGES



Hyva Pacific Ltd offer a full range of tried and tested hookloaders to suit any application. Constructed from high yield steels the hookloaders offer design and strength and weight benefits to maximise stability and payload.

Hyva Pacific offer a National Australian focus from a proven, International market leader in waste handling equipment, whilst having local State Sales and Service Agents to provide long term parts and service support to their customers.

The Hyva hookloader models extend from the 8 tonne City hooklifts right up to Semi Trailer mounted 30 tonnes lift models used in heavy duty applications.



All Hyvalift hookloaders include main lift cylinder load holding valves as standard, limited electrical interlocks and the 20 tonne lift models have large 80mm piston rods which guarantee to pick up the heaviest loads quickly and safely.

Additional options include frame mounted weighing cells, Radio Remote Controls and tarping Systems.




# HYVA LIFT HOOK LOADERS

## FEATURES AND BENEFITS



All models fitted with a swinging Safety Latch and 20 tonne models are available with a manually adjustable dual height pick up hook.

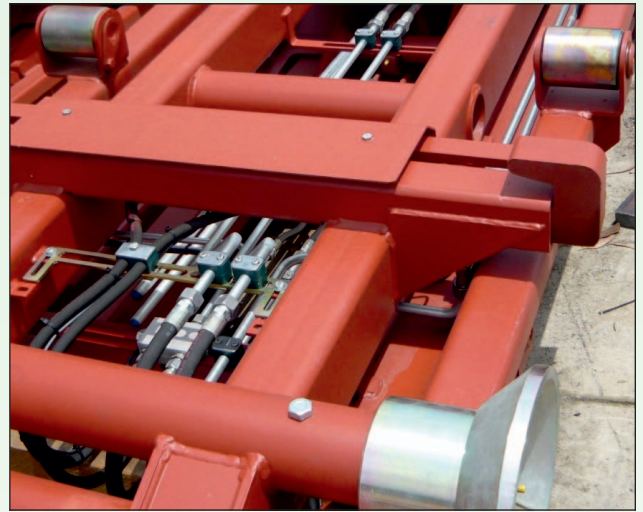

Rollers on the frame and Pedestal guides for quiet, smooth bin loading.



Simple pneumatic In cab Controls and indicator lights with external hydraulic override option. Safety Timers to suit Live Drive Pto's and In cab Emergency Stop Button.



Fail Safe mechanical Spring loaded peg to lock upper & Lower Frame together for tipping.




Hydraulic Rear Bin Locks as Standard with Inside and front Lock options. Standard Rear Locks fitted with electric valve to prevent damage when demounting a bin.





# HOOGLIFT TECHNICAL SPECIFICATIONS

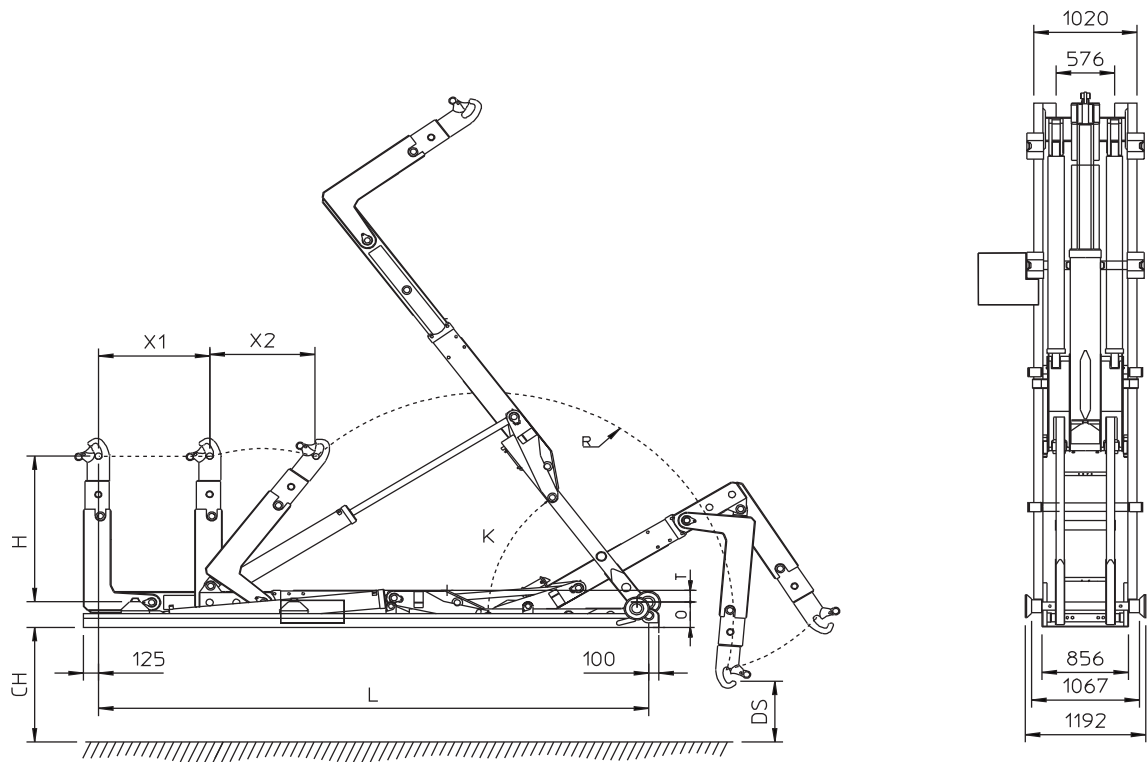

MODEL	8-36S	10-47S	16-53S	20-57S Optional 22 T	20-57 SK Optional 22 T	20-65 SK Optional 22 T
Lift Capacity kg	8,000 kg	10,000 kg	16,000 kg	20,000 kg	20,000 kg	20,000 kg
H (mm)	900	1450	1450 or 1570	1450 & 1570	1450 & 1570	1450 & 1570
X' (mm)	800	1000	1000	1200	1300	1300
X² (mm)	N/A	N/A	N/A	N/A	1050	1050
L (mm)	3600	4700	5350	5700	5850	6500
O (mm)	225	277	277	280	280	280
K	49°	50°	50°	47°	56°	51°
R (mm)	1828	2880	3045	3045	2455	2720
T (mm)	75	130	130	130	130	130
Weight¹ (kg)	1114	1930	2080	2475	2900	3100
DS (mm)	749	1006	1167	1167	580	687
Bin length (mm)	3000-4600	3750 - 5800	4400 - 6550	4550 - 6800	3650 - 6900	4150 - 7600
Loading (sec)	-	28	34	40	49	52
Unloading (s)	-	35	44	50	65	68
Tip (time)² (s)	-	30	39	43	51	55

Additional information is available for the heavier duty range of Hyva hookloaders from 26 - 40 tonnes lift capacity.

## Hyva Pacific Pty Ltd

199 Maitland Road, Hexham,  
NSW 2322, Australia  
FreeCall: 1800 041733  
Tel: +61 (0)2 4964 8489,  
Fax: +61 (0)2 4964 8797  
enquiries@hyva.com.au

Dealer: