



Construction Equipment & Engineering

Vehicle Loading Cranes

CALL 1800CRANES



HB100 KEY FEATURES

Known for its extensive versatility and user-friendliness, this range of basic articulated cranes have a lifting capacity range from 3 to 70 tonne metre. HB cranes are simple and low-weight given their light booms and extensions as well as lack of linkages. However, their articulate geometry and top-of-range components make them perfectly robust and flexible for wide-ranging applications.

**International Market
Leader in Waste
Handling Equipment
and
Transport Solutions.**

HYVALIFT MOVES
YOUR WORLD

■ (08) 9459 6212 / 1800CRANES
■ 0407 669 174

■ www.ronco.com.au
■ hyva@ronco.com.au



Construction Equipment & Engineering


Vehicle Loading Cranes

Dimensions & Specifications

HYVA® CRANE

HB 100

MODELS	LIFTING MOMENT	MAX VERTICAL REACH	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	WEIGHT OF STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	kg	l	l/min	mm B x h x S
HB100 E1	9,57	9,45	395	17	4	290	1080		60	25	2480x2170x640
HB100 E2	-	11,30	395	17	4	290	1185	150 Std.Man.	60	25	2480x2170x640
HB100 E3	-	13,20	395	17	4	290	1280	205 Ext.Man.	60	25	2480x2170x640
HB100 E4	-	15,30	395	17	4	290	1370	250 Ext.Hyd.	60	25	2480x2170x640
HB100 E5	-	17,30	395	17	4	290	1440		60	25	2480x2170x750

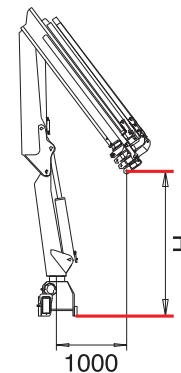

HB 100 E1 = 2460
 HB 100 E2 = 2460
 HB 100 E3 = 2330
 HB 100 E4 = 2210
 HB 100 E5 = 2100